


Crest III Packer

The Crest III Packer is a weight set service packer for high pressure remedial work, including acidizing, fracturing, squeeze cementing, etc. It will set with minimal tubing manipulation and will withstand differential pressure from above or below. A large integral fluid bypass allows the packer to be run quickly, with minimal chance of swabbing off packing elements or dulling hold down slips. No rotation is required to retrieve, and its equalizing valve opens with the first upward movement. Carbide tipped hold down slips, lower slips, and drag blocks are standard equipment.

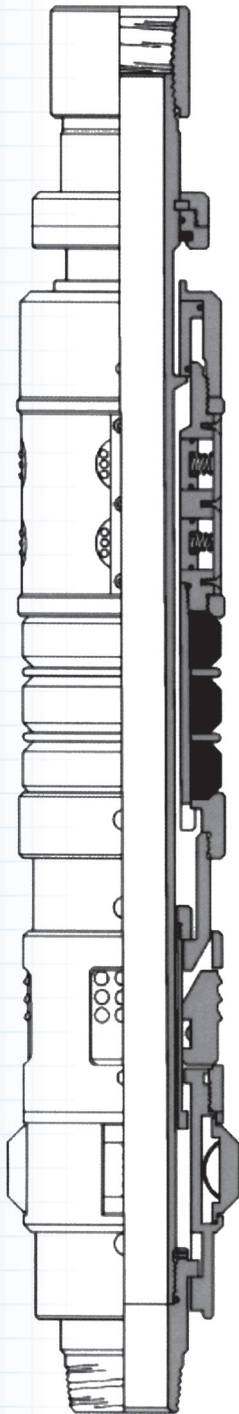

Specification Guide

Size	Casing Weight	Gage and Guide Ring O.D.	Packing Element O.D.	Packer Bore	Connections (box up/pin down)
3½	7.7 - 9.3	2.810	2.70	1.25	1.900 EU 10Rd
4	9.5 - 11.0	3.300	3.18	1.50	2¾ EU 8Rd
4½	9.5 - 13.5	3.750	3.62	1.88	2¾ EU 8Rd
5	15.0 - 18.0	4.125	3.94	1.88	2¾ EU 8Rd
5	11.5 - 15.0	4.250	4.12	1.88	2¾ EU 8Rd
5½	17.0 - 23.0	4.500	4.38	2.00	2¾ EU 8Rd
5½	14.0 - 17.0	4.641	4.50	2.00	2¾ EU 8Rd
5½	13.0 - 15.5	4.781	4.69	2.00	2¾ EU 8Rd
6¾	20.0 - 24.0	5.687	5.56	2.50	2¾ EU 8Rd
7	29.0 - 38.0	5.687	5.56	2.50	2¾ EU 8Rd
7	23.0 - 29.0	6.000	5.75	2.50	2¾ EU 8Rd
7	17.0 - 23.0	6.180	6.12	2.50	2¾ EU 8Rd
7¾	43.0 - 47.0	6.180	6.12	2.50	2¾ EU 8Rd
7¾	33.0 - 39.0	6.453	6.12	2.50	2¾ EU 8Rd
7¾	24.0 - 30.0	6.672	6.50	2.50	2¾ EU 8Rd
8¾	40.0 - 49.0	7.312	7.00	3.00	3½ EU 8Rd
8¾	28.0 - 36.0	7.625	7.00	3.00	3½ EU 8Rd
9¾	43.5 - 53.5	8.250	7.94	3.00	3½ EU 8Rd
9¾	32.3 - 43.5	8.500	8.38	3.00	3½ EU 8Rd